


**Parts needed to mount the SEPOD extrusion**



Extrusion (A)

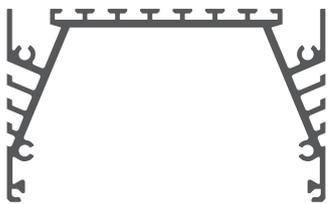

Mounting strip (B)



Cover (C)



End cap (D)



End cap (E)



Spring (F)



LED strip (G)


**Tools needed for mounting:**

- drill
- screwdriver


**NOTE!** All LED strips must be connected to a 12 V or 24 V power supply.

**IMPORTANT:** The manual presents the simplest mounting procedure. More mounting procedures and related accessories can be found at [www.klusdesign.eu](http://www.klusdesign.eu)


**1.** Drill a hole in the mounting strip (B).

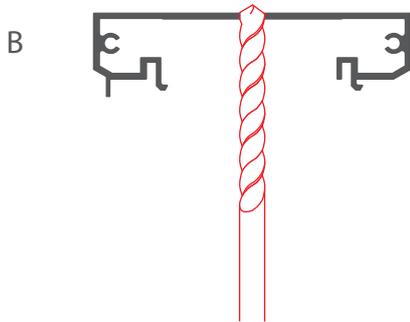


**2.** Feed the power cable and attach the mounting strip (B) to the mounting surface with screws.

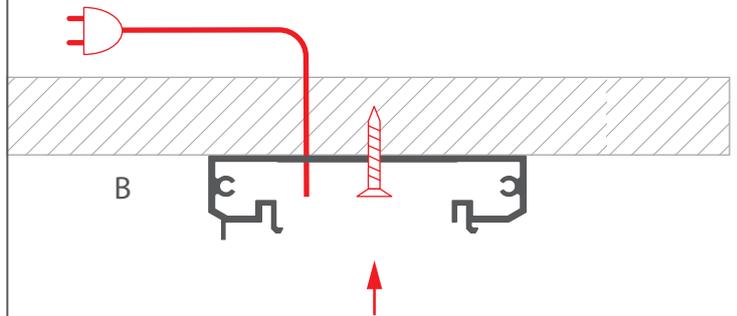


**3.** Feed the power cable. Insert springs (F) into the extrusion (A). Mount the LED strip (G) and insert the cover (C). Ilość sprężyn powinna wynosić: 4 dla profili 1-metrowych, 6 dla 2-metrowych oraz 8 dla 3-metrowych. Pierwsza i ostatnia sprężyna powinny znajdować się ok. 10-15 cm od końców profilu.

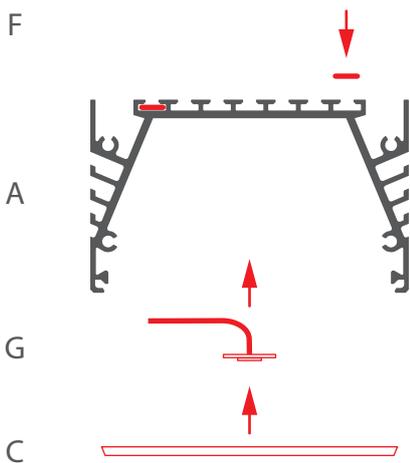

**4.** Connect power and assemble the extrusion (A) with the mounting strip (B).

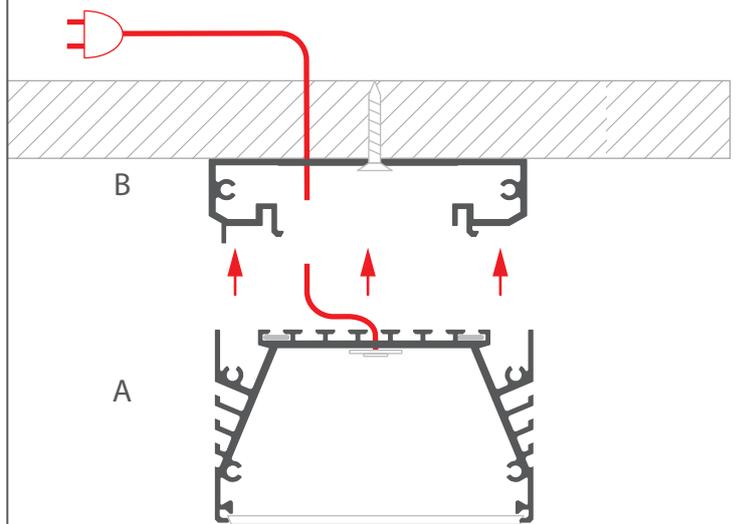

**5.** Attach the end caps (D) (E) to the extrusion (A) and the mounting strip (B).

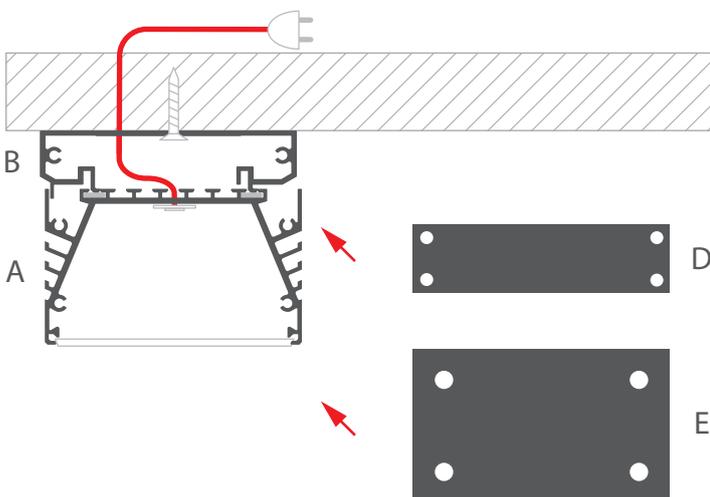

**NOTE!** When constructing polygonal fixtures, it is necessary to pay attention that the hooks of the assembly strip are turned to face outside the built shape. The last piece of the fixture to be mounted should be with the edges cut at an angle inwards to the inside of the polygon fixture.

