

Profile MICRO-30DEG-K

Ref. A00020



IP20



- Lighting angle: 30 Degrees
- Compact dimensions
- Dedicated for installation in furniture boards and built-in structures

APPLICATION

- furniture and decorative lighting


MOUNTING

- recessed, with mounting adhesive or double-sided adhesive tape

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

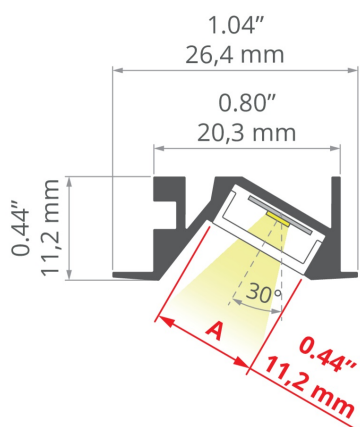

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	20.3 mm
Height	11.2 mm
LED gluing width A	11.2 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Lighting at an angle	30
Possibility of obtaining a line of light	yes
Building type	Commercial, Residential, HoReCa object, Entertainment/ Arts

Color	Length	Ref
silver anodized	1000 mm	A00020A_1
	2005 mm	A00020A_2
	3010 mm	A00020A_3
silver non anodized	1000 mm	A00020N_1
	2005 mm	A00020N_2
	3010 mm	A00020N_3
white lacquered	1000 mm	A00020L10_1
	2005 mm	A00020L10_2
	3010 mm	A00020L10_3
black anodized	1000 mm	A00020A07_1
	2005 mm	A00020A07_2
	3010 mm	A00020A07_3

Profile MICRO-30DEG-K

Ref. A00020


Facility zone

kitchen, bathroom, under-cabinet / furniture, exhibition / tradeshow / display, cove / perimeter, fitness / spa, media rooms / av

The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Furniture lighting	yes
Decorative lighting	yes
Under-cabinet lighting	yes
Wire out back of extrusion	yes

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

SAMPLE PROJECTS

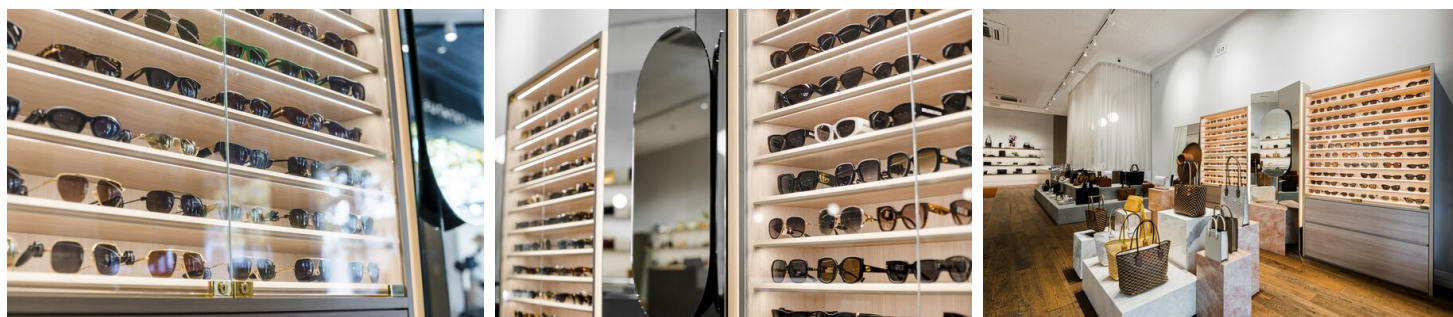

RELATED ACCESSORIES > COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover KA-11		PC	67 %	frosted	B17064F
			89 %	clear	B17064C
Cover KA-T-11		PVC	54 %	frosted	B17179F
			86 %	clear	B17179C
Cover HS-11		PC	59 %	frosted	B17208F
			88 %	clear	B17208C
Cover LIGER-11		PC	21 %	black	B17037B
			59 %	satin	B17037S

Profile MICRO-30DEG-K

Ref. A00020

RELATED ACCESSORIES > END CAPS

NAME			MATERIAL	COLOR	REF.
End cap MICRO-30DEG-K-L	NEW		ABS	black	C24546C07
				gray	C24546C02
				white	C24546C10
End cap MICRO-30DEG-K-P	NEW		ABS	black	C24547C07
				gray	C24547C02
				white	C24547C10

RELATED ACCESSORIES > RELATED LED > CRI 95+



KWP-CR-1440-24
KWP-CR-1440-24V

RELATED ACCESSORIES > RELATED LED > WHITE MONO



KWP-GHD-0480-24
KWP-GHD-0480-24




KWP-GHD-0960-24
KWP-GHD-0960-24



KWP-GHD-1440-24
KWP-GHD-1440-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM



K-18D30-0960-24
K-18D30-0960-24




K-27T50-1440-24
K-27T50-1440-24


Profile MICRO-30DEG-K

Ref. A00020

RELATED ACCESSORIES > RELATED LED > CRI 95+



KWP-CR-0480-24
KWP-CR-0480-24



KWP-CR-0960-24
KWP-CR-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY



K-VHE-0480-24
K-VHE-0480-24



K-VHE-0960-24
K-VHE-0960-24




K-VHE-1440-24
K-VHE-1440-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT



K-RGBW-1530-24
K-RGBW-1530-24



KWP-GRGBW-1530-24
KWP-GRGBW-1530-24



K-RGB-0700-24
K-RGB-0700-24V


RELATED ACCESSORIES > RELATED LED > WHITE MONO




K-0480-24
K-0480-24



K-0960-24
K-0960-24



K-1440-24
K-1440-24



K-2400-24
K-2400-24




K-HD-0480-24
K-HD-0480-24

Profile MICRO-30DEG-K

Ref. A00020



K-HD-0960-24
K-HD-0960-24



K-HD-1440-24
K-HD-1440-24



K-2300-24
K-2300-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR
ZM-PION



CONNECTOR
ZM-MINI
44501, C28083N00



CONNECTOR
ZM

RELATED ACCESSORIES > ELECTRONICS > SWITCHES




UNI-11
E61603




UNI-11P
E61604



UNI-M07P
E62154



UNI-M11
E62157



UNI-M11P
E62158



UNI-M07
E62153



UNI
E61579



UNI-P
E61580



MICRO
1491



MICRO
1491LOGO