

Profile MICRO-30DEG-KOZ

Ref. A00021

NEW



IP20



- Lighting angle: 30 Degrees
- Compact dimensions – no collision with ceiling structure
- Non visible aluminum elements
- Dedicated for installation in plasterboard

APPLICATION

- main and decorative lighting


MOUNTING

- in drywall, with mounting adhesive

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

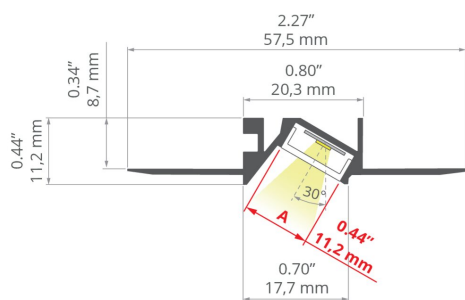

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	57.5 mm
Height	11.2 mm
LED gluing width A	11.2 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Lighting at an angle	30
Possibility of obtaining a line of light	yes
Building type	Entertainment/ Arts, Residential, Commercial
Facility zone	communication routes and corridors, wall lighting
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes

Length	Ref
1000 mm	A00021N_1
2005 mm	A00021N_2
3010 mm	A00021N_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

Profile MICRO-30DEG-KOZ

Ref. A00021

Decorative lighting	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes

SAMPLE PROJECTS



RELATED ACCESSORIES > COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover HS-11		PC	59 %	frosted	B17208F
			88 %	clear	B17208C
Cover KA-11		PC	67 %	frosted	B17064F
			89 %	clear	B17064C
Cover LIGER-11		PC	21 %	black	B17037B
			59 %	satin	B17037S
Cover KA-T-11		PVC	54 %	frosted	B17179F
			86 %	clear	B17179C

Profile MICRO-30DEG-KOZ

Ref. A00021

RELATED ACCESSORIES > END CAPS

NAME			MATERIAL	COLOR	REF.
End cap MICRO-30DEG-KOZ-L	NEW		ABS	 gray	C24548C02
End cap MICRO-30DEG-KOZ-P	NEW		ABS	 gray	C24549C02

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Stopień ochrony IP	Moc	Ref.
KWP-GHD-0480-24 NEW	65	4.8 W/m	KWP-GHD-0480-24
KWP-GHD-0960-24 NEW	65	9.6 W/m	KWP-GHD-0960-24
KWP-GHD-1440-24 NEW	65	14.4 W/m	KWP-GHD-1440-24
K-0480-24	20	4.8 W/m	K-0480-24
K-0960-24	20	9.6 W/m	K-0960-24
K-1440-24	20	14.4 W/m	K-1440-24
K-2400-24	20	24 W/m	K-2400-24
K-HD-0480-24	20	4.8 W/m	K-HD-0480-24
K-HD-0960-24	20	9.6 W/m	K-HD-0960-24
K-HD-1440-24	20	14.4 W/m	K-HD-1440-24
K-2300-24	20	23 W/m	K-2300-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Stopień ochrony IP	Moc	Ref.
K-CR-0480-24	20	4.8 W/m	K-CR-0480-24
K-CR-0960-24	20	9.6 W/m	K-CR-0960-24
K-CR-1440-24	20	14.4 W/m	K-CR-1440-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Stopień ochrony IP	Moc	Ref.
K-VHE-0480-24	20	4.8 W/m	K-VHE-0480-24
K-VHE-0960-24	20	9.6 W/m	K-VHE-0960-24
K-VHE-1440-24	20	14.4 W/m	K-VHE-1440-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Profile MICRO-30DEG-KOZ

Ref. A00021

Name	Stopień ochrony IP	Moc	Ref.
K-RGBW-1530-24	20	15.3 W/m	K-RGBW-1530-24
KWP-GRGBW-1530-24	65	15.3 W/m	KWP-GRGBW-1530-24
K-RGB-1200-24	20	12 W/m	K-RGB-1200-24
K-RGB-0700-24	20	7 W/m	K-RGB-0700-24V

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Stopień ochrony IP	Moc	Ref.
K-18D30-0960-24	20	9.6 W/m	K-18D30-0960-24
K-27T50-1440-24	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Material	Kolor	Ref.
ZM-PION	stainless steel	 silver	
ZM	stainless steel	 silver	

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Name	Stopień ochrony IP	Ref.
UNI-11 	20	E61603
UNI-11P 	20	E61604
UNI	20	E61579
UNI-P	20	E61580