

Fixture OKI-LEVEL




IP20



- A strong focal point of the arrangement – the dominant element of the space
- Clean form, without visible wires or connections
- Advanced LED sources ensure uniform, comfortable light with excellent color rendering (CRI > 90)
- Flexible shape adjustment by rotating profiles around the arm
- Customization on request, tailored dimensions, and color options

TECHNICAL DRAWING

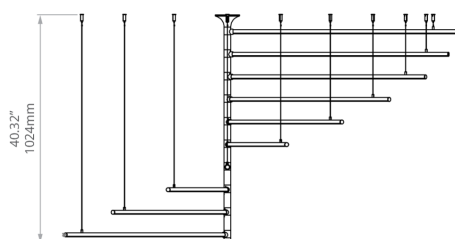

TECHNICAL SPECIFICATIONS

Material	PA12
Cover	frosted
Control	ON/OFF
Length [L]	1090 mm
Height H	1020 mm
Width [W]	1780 mm
Weight	3.2 kg
Lighting direction	down
IP protection rating	20
Luminare power	96 W
Input voltage	24 V
Protection class	III
Building type	Commercial, HoReCa object, Entertainment/ Arts
Facility zone	lobby / foyer, office

Color	Color temperature	Ref
■ black lacquered	3000 K	FPOL001-07300B
□ white lacquered	3000 K	FPOL002-10300B
■ black lacquered	4000 K	FPOL003-07400B
□ white lacquered	4000 K	FPOL004-10400B

Fixture OKI-LEVEL

KLUŚ Inspiring
Solutions

SAMPLE PROJECTS

