

Fixture TU BEAM BLACK




IP20



- Easy and intuitive adjustment, thanks to specially designed belts - the design provides full freedom of rotation, in every direction, by 360 degrees
- Three types of optics - focusing optics, focusing optics with blend, lamellas
- Possibility to obtain UGR < 10
- Three unique stylistic variants - Coastal, Industrial and Natural
- Modern soft shape of the profile
- Standardly equipped with a DALI power supply, enabling integration with the control system
- Equipped with a light source, electronics and mounting accessories

TECHNICAL DRAWING

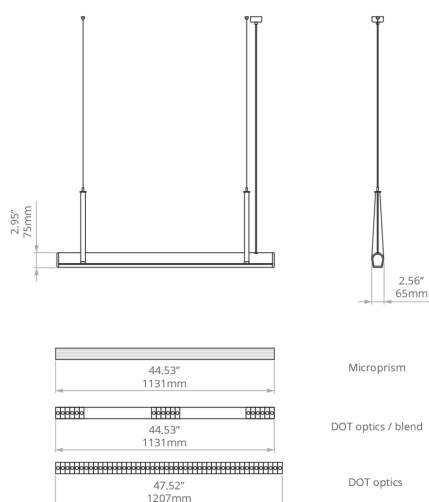

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ black anodized
Cover	DOT optics
Control	DALI
Mounting type	Suspended
Height H	75 mm
Width [W]	62.1 mm
Shape	linear
Lighting direction	down
IP protection rating	20
Lifetime	70000 h
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Fixture TU BEAM BLACK

Input voltage	220-240 V 50/60 Hz
Protection class	I
Kąt świecenia	27°
Unified glare rate	10
Building type	Commercial, Residential, HoReCa object, Entertainment/ Arts
Facility zone	conference room, lobby / foyer

Length [L]	Luminous flux of the fixture	Luminare power	Efficiency	Color temperature	Ref
1207 mm	1150 lm	17 W	68 lm/W	3000 K	FPTY021-0730DB
1207 mm	1150 lm	17 W	68 lm/W	4000 K	FPTY021-0740DB
1956 mm	1900 lm	25 W	76 lm/W	3000 K	FPTY022-0730DB
1956 mm	1900 lm	25 W	76 lm/W	4000 K	FPTY022-0740DB
3003 mm	2900 lm	36 W	81 lm/W	3000 K	FPTY023-0730DB
3003 mm	2900 lm	36 W	81 lm/W	4000 K	FPTY023-0740DB

SAMPLE PROJECTS

