




- Easy and intuitive adjustment, thanks to specially designed belts - the design provides full freedom of rotation, in every direction, by 360 degrees
- Three types of optics - focusing optics, focusing optics with blend, lamellas
- Possibility to obtain UGR < 10
- Three unique stylistic variants - Coastal, Industrial and Natural
- Modern soft shape of the profile
- Standardly equipped with a DALI power supply, enabling integration with the control system
- Equipped with a light source, electronics and mounting accessories

## TECHNICAL DRAWING

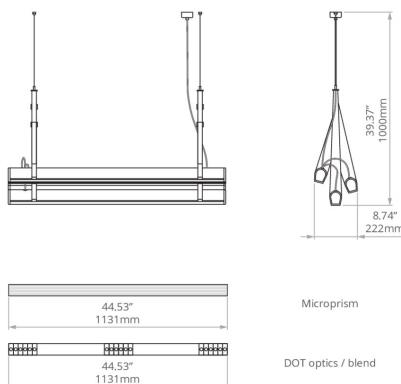

## TECHNICAL SPECIFICATIONS

Material	aluminum
Color	coastal lacquered
Control	DALI
Mounting type	Suspended
Length [L]	1131 mm
Height H	75 mm
Width [W]	62.1 mm
Shape	linear
Lighting direction	down
IP protection rating	20
Color temperature	3000 K
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Input voltage	220-240 V 50/60 Hz					
Protection class	I					
Building type	Commercial, Residential, HoReCa object, Entertainment/ Arts					
Facility zone	conference room, lobby / foyer					

Cover	Luminous flux of the fixture	Luminare power	Efficiency	Kąt soczewki Min	Unified glare rate	Ref
microprism	8100 lm	76 W	107 lm/W			FPTY041-1730DB
DOT optics / blend	3300 lm	43 W	77 lm/W	36°	13	FPTY042-1730DB

## SAMPLE PROJECTS

