


K-ML-28020-CC

Ref. K-ML-28020-CC

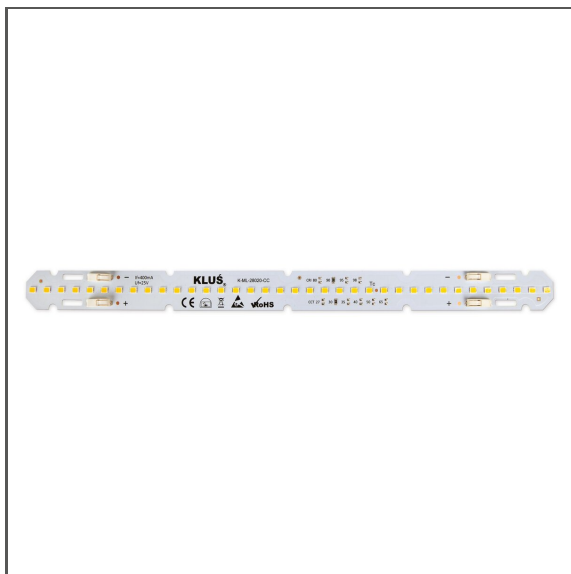

TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
Nominalny prąd zasilania	250 mA
Minimum output current	100 mA
Maksymalny prąd zasilania	400 mA
Power consumption	6 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Height [H]	6 mm
Width [W]	20 mm
Length [L]	280 mm
Energy consumption	6 kWh/1000h
Warranty [months]	60

Color temperature	Lumen output	Efficiency	Ref
3000 K	1110 lm/m	185 lm/W	K-ML30-
4000 K	1100 lm/m	183 lm/W	K-ML40-