


K-ML-7020-CC

Ref. K-ML-7020-CC

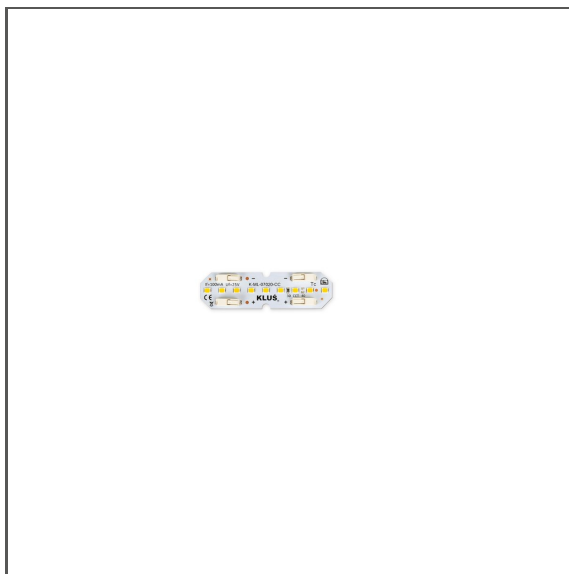

TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
Nominalny prąd zasilania	62.5 mA
Minimum output current	25 mA
Maksymalny prąd zasilania	100 mA
Power consumption	1.5 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Height [H]	1.5 mm
Width [W]	20 mm
Length [L]	70 mm
Energy consumption	1.5 kWh/1000h
Warranty [months]	60

Color temperature	Lumen output	Efficiency	Ref
 3000 K	250 lm/m	167 lm/W	K-ML30-
 4000 K	270 lm/m	180 lm/W	K-ML40-