

Parts needed to mount the STOS-ALU extrusion



Exrusion (A)



End caps (B)



Cover (C)



LED strip (D)



Clip (E)



Mounting strip
TEST-36 (F)


Tools needed for mounting:

- drill
- screwdriver
- screws


NOTE! All LED strips must be connected to a 12 V or 24 V power supply.

IMPORTANT: The manual presents the simplest mounting procedure.
More mounting procedures and related accessories can be found at www.klusdesign.eu


1. Drill holes in the mounting strip (F).

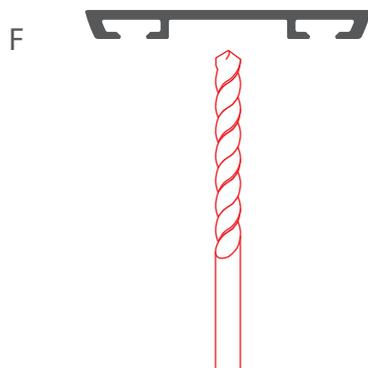

2. Mount the mounting strip (F) using screws and insert the clip (E).

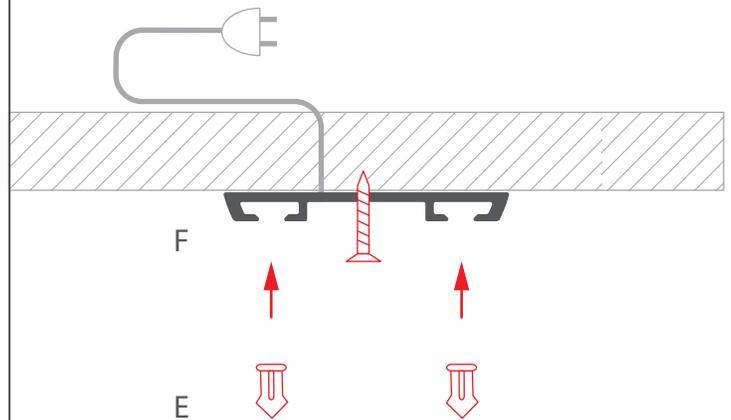

3. Mount the LED strip (D), insert the cover (C), and then insert the end cap (B). Feed the power cable.

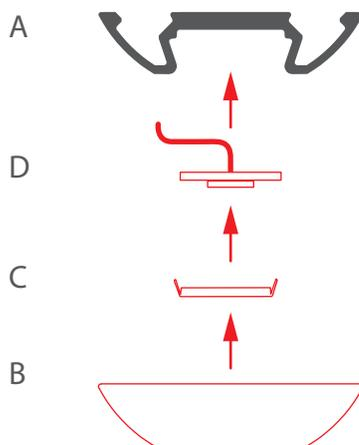

4. Attach the extrusion (A) to the mounting strip (F) and connect power.

