



Polar diagram

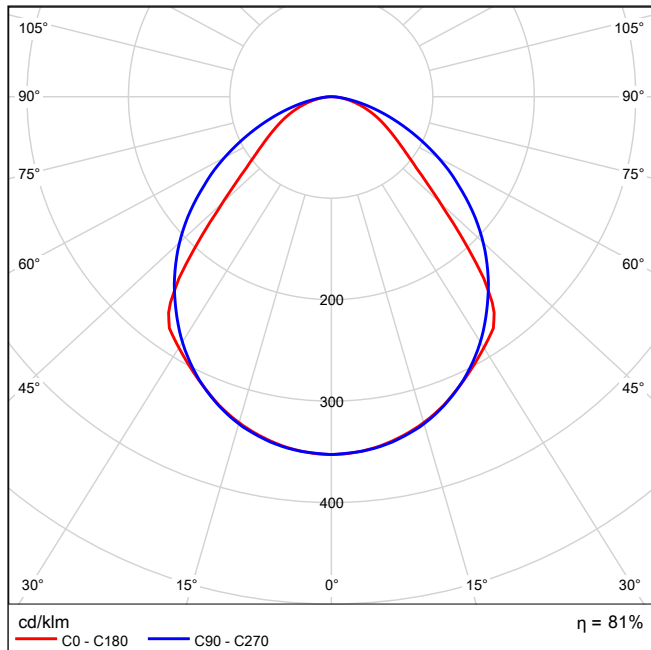

Cone diagram

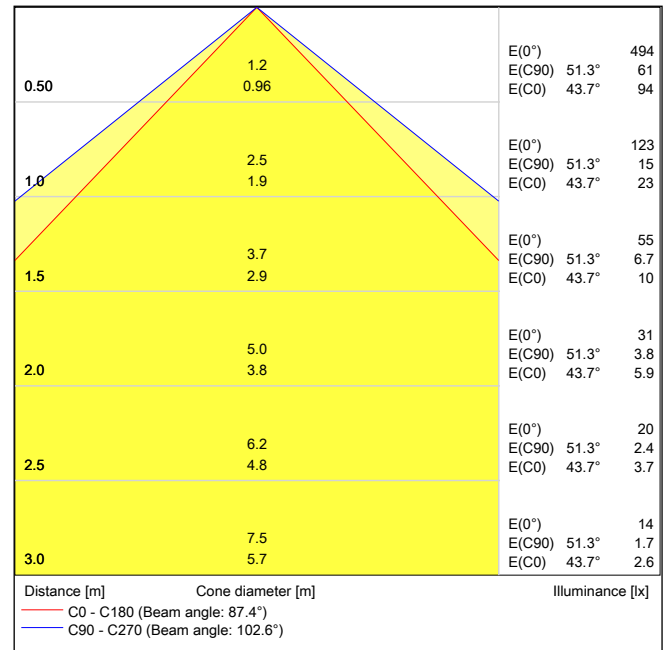

UGR diagram

Glare evaluation according to UGR													
$\rho$ Ceiling	70	70	50	50	30	70	70	50	50	30			
$\rho$ Walls	50	30	50	30	30	50	30	50	30	30			
$\rho$ Floor	20	20	20	20	20	20	20	20	20	20			
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis							
2H	2H	17.8	19.0	18.1	19.2	19.5	21.1	22.3	21.4	22.5	22.7		
	3H	18.4	19.5	18.7	19.7	20.0	22.2	23.3	22.5	23.5	23.8		
	4H	18.6	19.6	18.9	19.9	20.2	22.5	23.5	22.9	23.8	24.1		
	6H	18.7	19.6	19.1	19.9	20.2	22.7	23.7	23.1	24.0	24.3		
	8H	18.7	19.6	19.1	19.9	20.3	22.8	23.7	23.1	24.0	24.3		
	12H	18.7	19.6	19.1	19.9	20.2	22.8	23.6	23.2	24.0	24.3		
4H	2H	18.4	19.4	18.7	19.7	19.9	21.2	22.2	21.5	22.4	22.7		
	3H	19.1	19.9	19.4	20.2	20.6	22.4	23.2	22.7	23.5	23.9		
	4H	19.4	20.1	19.8	20.5	20.8	22.8	23.6	23.2	23.9	24.3		
	6H	19.5	20.2	20.0	20.6	21.0	23.1	23.8	23.5	24.1	24.5		
	8H	19.6	20.2	20.0	20.6	21.0	23.2	23.8	23.6	24.2	24.6		
	12H	19.6	20.1	20.0	20.5	21.0	23.2	23.7	23.7	24.2	24.6		
8H	4H	19.5	20.1	20.0	20.5	20.9	22.8	23.4	23.2	23.8	24.2		
	6H	19.8	20.3	20.2	20.7	21.1	23.1	23.6	23.6	24.0	24.5		
	8H	19.9	20.3	20.3	20.7	21.2	23.2	23.7	23.7	24.1	24.6		
	12H	19.9	20.2	20.4	20.7	21.2	23.3	23.7	23.8	24.1	24.6		
12H	4H	19.5	20.1	20.0	20.5	20.9	22.8	23.3	23.2	23.7	24.2		
	6H	19.8	20.2	20.3	20.7	21.1	23.1	23.5	23.6	24.0	24.5		
	8H	19.9	20.2	20.4	20.7	21.2	23.2	23.6	23.7	24.1	24.6		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.7 / -0.9					+0.2 / -0.3						
S = 1.5H		+1.3 / -1.6					+0.4 / -0.6						
S = 2.0H		+2.1 / -2.2					+1.3 / -1.6						
Standard table		BK03					BK04						
Correction summand		1.4					5.3						
Corrected glare indices referring to 350lm Total luminous flux													

The UGR values are calculated in acc. with CIE Publ. 117. Spacing-to-Height-Ratio = 0.25